E.4.1 - SECONDARY JUNCTION BOXES

REQUIRED SECONDARY JUNCTION BOX TYPES:

1. PEN-CELL (#AG-14HDXNL)
2. NORDIC (#PRMC-150)

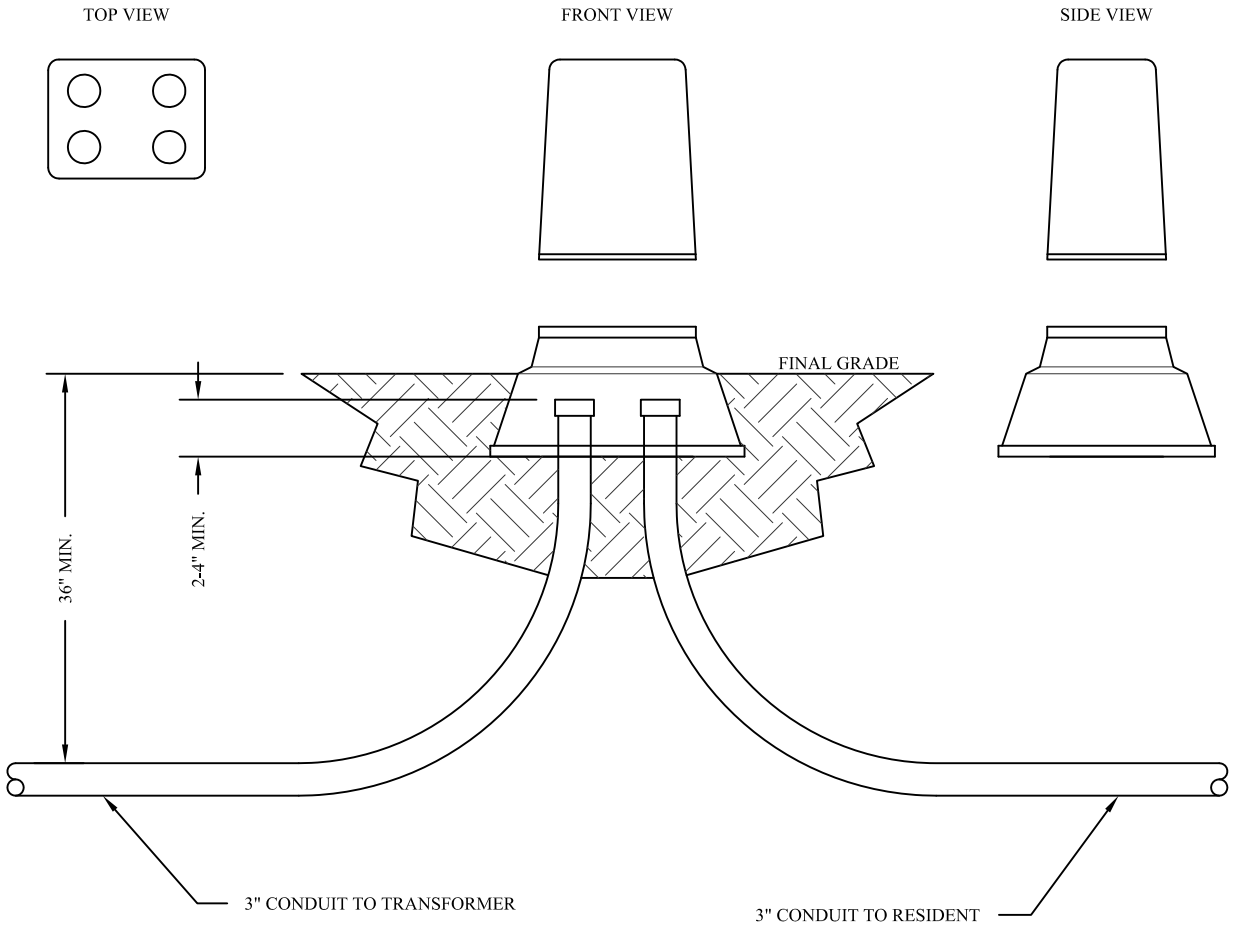

NOTES:

1. DEVELOPERS TO PROVIDE AND INSTALL SECONDARY JUNCTION BOXES WITH 3" STUBOUTS.
2. DEVELOPER SHALL PROVIDE MINIMUM SPACING BETWEEN CONDUITS.
3. DEVELOPER TO SEAL ALL CONDUIT ENDS WITH PERMANENT CAPS TO PREVENT PLUGGING
4. DEVELOPER IS RESPONSIBLE FOR TRENCHING AND BACK FILLING.
5. DEVELOPER SHALL USE ONE OF THE TWO ACCEPTABLE JUNCTION BOXES LISTED ABOVE.